keegg



KG4 EU Smart Ebike

IoT enabled Ebike solutions for delivery

25 - 32 kph

LEGAL TOP SPEED

65 kg

RACK CAPACITY

90-100 km

RANGE PER CHARGE

1 or 7

GEAR SPEED

Built for Delivery

Based on testing with couriers for more than a year, every detail of the KG4 has been thought through to enhance courier productivity.



*With two batteries and under typical conditions.



Dual Removable Batteries

Long range. Switch the batteries or charge them for a second shift.



Front Rack Mounts on the Frame

Instead of mounting on the fork, the rack sits on the frame and remains steady when turning.



Fast-charging

No need to spend so many hours charging the batteries.



Premium Shock Absorbers

Keep cargo safe and stable on the way.



Range Up to 90-100 Km

With a second optional battery, you have a long battery range that keeps you on the road longer



Optional Front & Rear Racks & Bags

Heavy groceries of all kinds are no longer a challenge.

KG4 EU

| Specifications | | |
|--------------------------------------|---|--|
| Model | KG4 Delivery Rear Hub | |
| Dimensions | 1800 x 650 x 1000 mm (to top of stem) | |
| Frame Size | 20" 6061 Aluminium Alloy Frame | |
| Handlebars | Aluminum alloy | |
| Display | LCD Display showing speed,pedal assist level and battery status Kickstand | |
| Lights | Front and rear integrated lights | |
| Wheel Size | 20 x 3.0" Puncture Resistant Tyres | |
| Wheelbase | 1300 mm | |
| Gears | 1 or 7 gear speed | |
| Chain Wheel | 52T | |
| Brakes | Front and rear 4 piston hydraulic disc brakes with 2.3mm thick discs | |
| Max Payload Capacity | 165 kg | |
| Max Front Rack Capacity (optional) | 15 kg | |
| Max Rear Rack Capacity (optional) | 50 kg | |
| Max Speed (Pedal Assist or throttle) | 25 km/h (EU), 32 km/h (US) | |
| Bike Weight | 32 kg | |
| Kickstand | Dual Leg Kickstand | |
| Color | ■ Blue/Custom | |

| Battery | |
|------------------|--|
| Туре | Removable Lithium-ion (One is standard, Second Optional) UN38.3 & MSDS Certified |
| Capacity | 15Ah |
| Rated Voltage | 36V |
| Range per charge | 90-100 km* |


| Motor | |
|---------------------|-----------------|
| Туре | Rear Hub |
| Rated Power | 350W (USA 500W) |
| Rated Voltage | 36V |
| Rated Output Torque | 55 Nm |
| | |


| Certification | |
|---------------|--|
| | EN15194, MSDS, UN38.3, UL2849 / UL2271, CPSC |

^{*} The range will vary depending on the conditions the bike is ridden in e.g. the weight/load the bike is carrying, level of battery assistance, steepness of hills etc.

Software Platform

Keep track of all your fleet management assets in real-time with the IoT integrated Keego software platform specially designed to work seamlessly with Keego Mobility Ebikes.

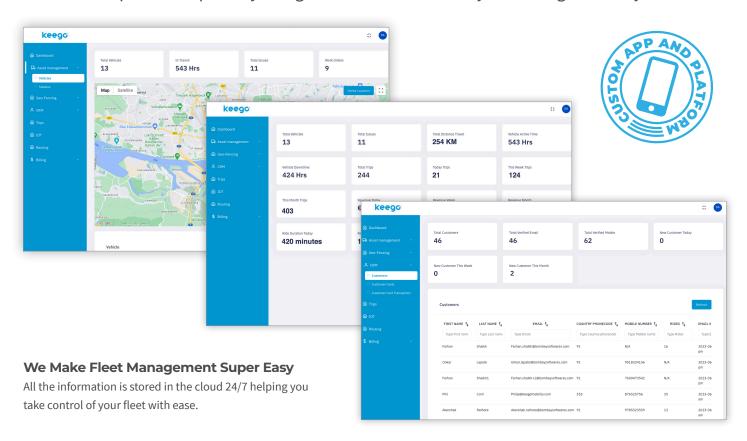

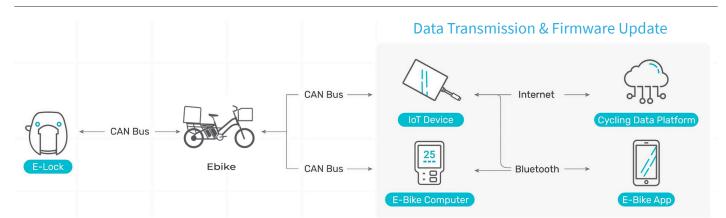



For further information contact: keegomobility.com